

AGRICULTURE PRODUCT CATALOGUE



wolf[®]
LUBRICANTS



WOLF THE VITAL LUBRICANT

Nothing brings engines to life like Wolf Lubricants, giving them the vital energy to enhance performance.

Wolf caters to the latest generation of engines, offering cutting-edge lubricants that incorporate the newest technological innovations and meet the highest standards and official OEM approvals.

Our wide product range offers you a one-stop solution for the rapidly changing lubricants market.

WOLF OIL CORPORATION THE COMPANY BEHIND THE BRAND

We pride ourselves on being a 'pure player' in our industry. We are 100% dedicated to lubricants. We've been creating next-generation products since 1955 and have amassed more than 60 years of knowledge and expertise. As one of Europe's leading independent lubricants companies, we are specialist, focusing on meeting the diverse needs of our customers with high-quality, technology-enhanced lubricants.

We add value with a full-service approach that includes technical advice, real-time supply and on-going training and support.

We are big enough to deliver, yet small enough to care.



WOLF OIL CORPORATION HQ

WOLF PRODUCT TECHNOLOGY: MULTIFACTOR OIL SERUM

This advanced lubricant technology increases the lifespan of lubricants and keeps engines young:

- The Multifactor Oil Serum contains 20 active ingredients for increased engine protection.
- These formulations combine the ideal ratio of antioxidants, dispersants and viscosity modifiers.
- This sophisticated chemistry means the original properties of our lubricants are maintained for longer.
- Delaying oil deterioration helps extend engine lifespan.



5 KEY BENEFITS OF OUR TECHNOLOGY



KEEPS ENGINES CLEAN



IMPROVES ENGINE PROTECTION



EXTENDS DRAIN INTERVALS



REDUCES FUEL CONSUMPTION



LOWERS CO² EMISSIONS

BRAKE, STEERING AND FORK FLUIDS

BRAKE FLUID DOT 4 LV

PRODUCT CODE 5093



SPECIFICATIONS

FMVSS - 116 DOT 4
 FMVSS - 116 DOT 3
 ISO - 4925 Class 3,4&6
 SAE - J 1703
 SAE - J 1704

DESCRIPTION

Especially recommended for use in hydraulic brake and clutch systems of vehicles fitted with ESP and ABS giving outstanding performance at very low temperatures.

250ML	1047754	5L	1047759	205L	1047764
500ML	1047756	20L	1047760	1000L	1047765
1L	1047758	60L	1047761		

RADIATOR FLUIDS

COOLANT-36°C LONGLIFE G12++

PRODUCT CODE 50104



SPECIFICATIONS

ASTM - D3306
 ASTM - D4985
 MAN - 324 Si-OAT
 MB - 325.5
 SAE - J1034
 VW - TL 774-G

DESCRIPTION

This "lobrid" MEG based engine coolant combines the Organic Additive Technology with mineral (silicate) corrosion inhibitors.

4L	1048157	20L	1042511	205L	1042512
----	---------	-----	---------	------	---------

HYDRAULIC OILS

HYDRAULIC HLP-D ISO 46

PRODUCT CODE 4026 - MINERAL



SPECIFICATIONS

DIN - 51524 T2 HLPD
 MAN - N698-H-LPD

DESCRIPTION

This is a mineral oil-based hydraulic fluid containing a selective additive system, for protection of hydraulic systems, plus the addition of detergent/dispersant additives.

205L	8315527
------	---------

A

ALL-PURPOSE EP NR. 0	32
ALL-PURPOSE EP NR. 00	32
ANTI-FREEZE LONGLIFE G12+	27
ANTI-FREEZE LONGLIFE G13	27
ANTI-FREEZE STANDARD G11	27
AROW HV ISO 22	24
AROW HV ISO 32	24
AROW HV ISO 46	24
AROW HV ISO 68	24
AROW HV ISO 100	25
AROW HVLPD ISO 46	25
AROW ISO 22	23
AROW ISO 32	23
AROW ISO 46	23
AROW ISO 68	23
AROW ISO 100	23
AROW SAE 10W	24
AROW XHV ISO 32	25
AROW XHV ISO 2268	25

B

BIO HYDRAULIC FLUID 2268	25
BRAKE FLUID DOT 3&4	26
BRAKE FLUID DOT 5.1	26

C

CALCIUM LITHIUM EP2 HEAVY	32
COLD CLEANER	30
COOLANT -36°C LONGLIFE G13	27
COOLANT-36°C LONGLIFE G12+	27
COOLANT -36°C STANDARD G11	28
CORS COMBI 10W30 LA	21

D

DIESEL PARTICULATE FILTER CLEANER	30
-----------------------------------	----

E

ECOTECH 5W30 ULTRA	10
EXTENDTECH 15W40	12
EXTENDTECH 80W140 GL5	16
EXTENDTECH 85W140 GL 5	16
EXTENDTECH 75W90 GL 5	16
EXTENDTECH 80W90 GL 5	16
EXTENDTECH ATF D II	18

G

GUARDTECH 15W40 CF-4	13
GUARDTECH 20W50 CF-4	13
GUARDTECH 80W90 GL 4	17
GUARDTECH 80W90 GL 1&3	17
GUARDTECH 15W40 PLUS CF-4	12
GUARDTECH 15W40 SHPD	12
GUARDTECH 20W50 SHPD	12
GUARDTECH 10W CF-4/SG	13
GUARDTECH 20W CF-4/SG	13
GUARDTECH 80W GL 4	16
GUARDTECH SAE 140 GL 1&3	17
GUARDTECH SAE 30 CF-4/SG	13
GUARDTECH SAE 40 CF-4/SG	14
GUARDTECH SAE 50 CF-4/SG	14

H

HIGH TEMPERATURE GREASE 2	33
---------------------------	----

L

LITHIUM CALCIUM EP2 GREEN	32
LITHIUM COMPLEX EP 2	31
LITHIUM GREASE EP 1	31
LITHIUM GREASE EP 2	31
LITHIUM GREASE EP 3	31
LITHIUM GREASE EPA	33

M

MULTI MOLY GREASE 2	33
MULTIPURPOSE GREASE 2	31
MULTIPURPOSE GREASE 3	32

O

OFFICIALTECH 75W90 GL 5	15
OFFICIALTECH 80W90 LS GL 5	15
OFFICIALTECH 85W90 M GL 5	15
OFFICIALTECH 10W30 MS	8
OFFICIALTECH 15W40 MS	10
OFFICIALTECH 10W30 MS EXTRA	8
OFFICIALTECH 10W40 MS EXTRA	9
OFFICIALTECH 15W40 MS EXTRA	10
OFFICIALTECH 10W40 S2	10
OFFICIALTECH 10W40 S3	9
OFFICIALTECH 10W40 UHPD	9
OFFICIALTECH 10W40 UHPD S	9
OFFICIALTECH 10W40 ULTRA MS	9
OFFICIALTECH 5W30 UHPD	8
OFFICIALTECH 5W30 UHPD EXTRA	8
OFFICIALTECH 5W30 UHPD EXTRA S	8

S

S.T.O.U. 10W30	21
S.T.O.U. 10W40	21
S.T.O.U. 15W30	21
S.T.O.U. 15W40	21
SUPER CPO 10W40	22

T

TDTO SAE 10W	20
TRACTOFLUID 50	19
TRACTOFLUID 100	19
TRACTOFLUID 170	19
TRACTOFLUID 400	19
TRACTOFLUID 500	20
TRACTOFLUID 600	20
TRACTOFLUID 170 BM	19

V

VITALTECH 10W40	11
VITALTECH 15W40	11
VITALTECH 20W50	12
VITALTECH 10W40 EXTRA	11
VITALTECH 15W40 EXTRA	11
VITALTECH 75W90 GL 5	15
VITALTECH 80W90 GL 5	15
VITALTECH 10W30 HD	10
VITALTECH 10W40 ULTRA	11
VITALTECH ATF D III	18
VITALTECH MULTI VEHICLE ATF	18

W

WINDSCREEN -22°C READY TO USE	29
WINDSCREEN CONCENTRATE	29
WINDSCREEN WASHER SUMMER READY TO USE	29

OFFICIALTECH 5W30 UHPD EXTRA

PRODUCT CODE 65622
FULL SYNTHETIC



SPECIFICATIONS

- ACEA - E6
- ACEA - E9
- API - CK-4
- MAN - M3677
- MB - 228.52
- VOLVO - VDS-4.5

DESCRIPTION

Synthetic engine oil with increased oxidative stability and resistance to aeration. High shear resistance and preservation of its outstanding properties during the entire period between oil changes.

5L	8335457	60L	8335754	1000L	8335952
20L	8335655	205L	8335853		

OFFICIALTECH 5W30 UHPD EXTRA S

PRODUCT CODE 65626
FULL SYNTHETIC



SPECIFICATIONS

- ACEA - E6
- ACEA - E9
- API - CK-4
- MAN - M3677 In Process
- MB - 228.51
- VOLVO - VDS-4.5

DESCRIPTION

Synthetic engine oil with excellent engine protection and extended drain intervals without ever compromising on engine protection. The ultra-thin protective oil film retains its excellent protective.

5L	8330261	60L	8330568	1000L	8330766
20L	8330469	205L	8330667		

OFFICIALTECH 5W30 UHPD

PRODUCT CODE 65613
FULL SYNTHETIC



SPECIFICATIONS

- ACEA - E6-16
- ACEA - E9-16
- MAN - M3477
- MAN - M3677
- MB - 228.51
- VOLVO - VDS-4

DESCRIPTION

Full synthetic lubricant satisfying the highest performance standards for large trucks. The formulation includes a state of the art friction modifier for improved fuel economy.

5L	8337635	60L	8325762	1000L	8325465
20L	8325663	205L	8325861		

OFFICIALTECH 10W30 MS EXTRA

PRODUCT CODE 15755
SEMI SYNTHETIC



SPECIFICATIONS

- ACEA - E9
- API - CK-4
- CATERPILLAR - ECF-3
- MB - 228.31
- RENAULT - RLD-4
- VOLVO - VDS-4.5

DESCRIPTION

Semi-synthetic lubricant with improved viscosity characteristics for on and off-road applications. Exceptional wear and oxidation resistance. For engines equipped with after-treatment systems.

5L	8334252	60L	8334559	1000L	8334757
20L	8334450	205L	8334658		

OFFICIALTECH 10W30 MS

PRODUCT CODE 15725
SEMI SYNTHETIC



SPECIFICATIONS

- ACEA - E9
- API - CJ-4/SN
- CATERPILLAR - ECF-3
- MAN - M3575
- RENAULT - RLD-3
- VOLVO - VDS-4

DESCRIPTION

This is a semi synthetic lubricant based on carefully selected highly refined base oils. It is "Low SAPS" developed to meet Euro V, Euro VI and U.S. EPA 07 emission standards.

5L	8339530	60L	8318856	1000L	8319051
20L	8318658	205L	8318955		

OFFICIALTECH 10W40 MS EXTRA

PRODUCT CODE 15756
SEMI SYNTHETIC



SPECIFICATIONS

- ACEA - E9
- API - CK-4
- CATERPILLAR - ECF-3
- MB - 228.31
- RENAULT - RLD-4
- VOLVO - VDS-4.5

DESCRIPTION

This semi-synthetic lubricant offers excellent wear resistance and engine protection to a wide range of on and off-road diesel vehicles requiring a 10W40 engine oil.

20L	8336850	60L	8336959	205L	8337055
-----	---------	-----	---------	------	---------

OFFICIALTECH 10W40 UHPD

PRODUCT CODE 15726
FULL SYNTHETIC



SPECIFICATIONS

- ACEA - E6
- ACEA - E9
- API - CJ-4/SN
- MAN - M3477
- MB - 228.51
- VOLVO - VDS-4

DESCRIPTION

This is a full synthetic lubricant which satisfies the highest performance standards for large trucks. Used for engines equipped with after treatment systems, in combination with low-sulfur diesel.

20L	8323973	205L	8329166
60L	8329067	1000L	8325694

OFFICIALTECH 10W40 UHPD S

PRODUCT CODE 15706
SEMI SYNTHETIC



SPECIFICATIONS

- ACEA - E6
- ACEA - E9
- API - CK-4
- MAN - M3477
- MB - 228.51
- VOLVO - VDS-4.5

DESCRIPTION

A synthetic blend lubricant which satisfies the highest performance standards for large trucks. Used for engines equipped with after treatment systems.

5L	8331466	60L	8331763	1000L	8331862
20L	8331664	205L	8339950		

OFFICIALTECH 10W40 ULTRA MS

PRODUCT CODE 65603
FULL SYNTHETIC



SPECIFICATIONS

- ACEA - E6-16
- API - CJ-4
- MAN - M3477
- MB - 228.51
- RENAULT - RLD-2
- VOLVO - VDS-3

DESCRIPTION

This is a full synthetic ultra-high performance oil of the latest technology. Suitable for engines of large trucks with particulate filters, in combination with low-sulfur diesel (maximum 50 ppm).

5L	8307317	60L	8316272	1000L	8316470
20L	8316074	205L	8316371		

OFFICIALTECH 10W40 S3

PRODUCT CODE 1727
SEMI SYNTHETIC



SPECIFICATIONS

- ACEA - E4-12
- MAN - M3277
- MB - 228.5
- MACK - EO-N
- RENAULT - RLD-2
- VOLVO - VDS-3

DESCRIPTION

Semi synthetic lubricant based on carefully selected very high quality base oils. This "long-drain" oil is engineered to provide outstanding lubrication to modern, high performance diesel engines.

20L	8313790	205L	8313998
60L	8313899	1000L	8314094

OFFICIALTECH 10W40 S2

PRODUCT CODE 1627
SEMI SYNTHETIC



SPECIFICATIONS

ACEA - E7-08 Issue 2
API - CI-4
MACK - EO-N
RENAULT - RLD-2
VOLVO - VDS-3

DESCRIPTION

Semi-synthetic "long-drain" UHPD engine oil. Meets the toughest requirements of the European manufacturers of heavy trucks and guarantees the highest level of engine cleanliness.

20L	8300042	205L	8300349
60L	8300240	1000L	8300448

OFFICIALTECH 15W40 MS EXTRA

PRODUCT CODE 15757
MINERAL



SPECIFICATIONS

ACEA - E9
API - CK-4
CATERPILLAR - ECF-3
CUMMINS - CES 20086
MB - 228.31
VOLVO - VDS-4.5

DESCRIPTION

High wear resistance with improved oxidation resistance and shear resistance. This after-treatment system compatible engine oil is backward compatible for most OEMs.

5L	8334856	60L	8335150	1000L	8335358
20L	8335051	205L	8335259		

OFFICIALTECH 15W40 MS

PRODUCT CODE 15736
MINERAL



SPECIFICATIONS

ACEA - E9
API - CJ-4/SN
CATERPILLAR - ECF-3
CUMMINS - CES 20081
MAN - M3575
VOLVO - VDS-4

DESCRIPTION

This is a "Low SAPS" oil, made of specially selected, high-quality base oils and a customized additive package, in order to meet Euro V, Euro VI and U.S. EPA 07 emission standards.

5L	8302411	60L	8319457	1000L	8319655
20L	8319259	205L	8319556		

ECOTECH 5W30 ULTRA

PRODUCT CODE 1215
FULL SYNTHETIC



SPECIFICATIONS

ACEA - E4-16
ACEA - E7-16
MAN - M3277
MB - 228.5
SCANIA - LDF-3
VOLVO - VDS-3

DESCRIPTION

Full synthetic Ultra High Performance Diesel engine oil, meeting the highest performance standards for heavy trucks. It provides optimal protection against wear and ageing.

20L	8302237	205L	8302534
60L	8302435	1000L	8302633

VITALTECH 10W30 HD

PRODUCT CODE 14625
SEMI SYNTHETIC



SPECIFICATIONS

ACEA - A3/B4-12
ACEA - E7-12
API - CI-4/SL
CATERPILLAR - ECF-2
MB - 228.3
VOLVO - VDS-3

DESCRIPTION

Semi synthetic lubricant with excellent fluidity at variable temperature conditions and reducing wear and fuel consumption. High thermal stability and longer oil drain intervals.

20L	8338458	205L	8338656
60L	8338557	1000L	8338755

VITALTECH 10W40 ULTRA

PRODUCT CODE 1227
SEMI SYNTHETIC



SPECIFICATIONS

ACEA - E4-16
ACEA - E7-16
API - CI-4
MAN - M3277
MB - 228.5
VOLVO - VDS-3

DESCRIPTION

This is a semi synthetic Ultra High Performance Diesel engine oil that meets the highest performance standards for heavy trucks. This oil is not suitable for vehicles fitted with particulate filters.

5L	8300806	60L	8303630	1000L	8303838
20L	8303432	205L	8303739		

VITALTECH 10W40 EXTRA

PRODUCT CODE 26626
SEMI SYNTHETIC



SPECIFICATIONS

ACEA - E7-08 Issue 2
API - CI-4/SL
MAN - M3275-1
MB - 228.3
RENAULT - RLD-2
VOLVO - VDS-3

DESCRIPTION

Synthetic base lubricant for geographical regions with high sulphur content fuels. Excellent protection against deposits in oil pipes, turbo's and provides improved protection against camshaft wear.

5L	8337314	60L	8337819	1000L	8337512
20L	8337710	205L	8337918		

VITALTECH 10W40

PRODUCT CODE 14626
SEMI SYNTHETIC



SPECIFICATIONS

ACEA - E7
API - CI-4/SL
MAN - M3275-1
MB - 228.3
RENAULT - RLD-2
VOLVO - VDS-3

DESCRIPTION

Semi synthetic motor oil, which provides excellent protection against deposits in pipes and turbo engines. It also ensures optimal protection against camshaft wear.

5L	8300912	60L	8315251	1000L	8315459
20L	8315053	205L	8315350		

VITALTECH 15W40 EXTRA

PRODUCT CODE 26636
MINERAL



SPECIFICATIONS

ACEA - E7-08 Issue 2
API - CI-4/SL
CUMMINS - CES 20078
MAN - M3275-1
MB - 228.3
VOLVO - VDS-3

DESCRIPTION

Universal mineral heavy duty Long Drain diesel oil with higher TBN providing excellent protection against deposits and showing an improved camshaft wear protection.

5L	8319426	60L	8319587	1000L	8319785
20L	8319488	205L	8319686		

VITALTECH 15W40

PRODUCT CODE 14636
MINERAL



SPECIFICATIONS

ACEA - E7
API - CI-4/SL
MAN - M3275-1
MB - 228.3
RENAULT - RLD-2
VOLVO - VDS-3

DESCRIPTION

This is a high-performance mineral diesel engine oil which delivers reliable performance in a broad range of heavy-duty applications. Suitable for Euro II, Euro III and some Euro IV engines.

1L	8301018	20L	8315657	205L	8315954
5L	8301117	60L	8315855	1000L	8316050

VITALTECH 20W50

PRODUCT CODE 14647
MINERAL

SPECIFICATIONS

ACEA - E7-08 Issue 2
API - CI-4/SL
MAN - M3275-1
MB - 228.3
RENAULT - RLD-2
VOLVO - VDS-3

DESCRIPTION

Mineral diesel engine oil delivering reliable performance in a broad range of heavy-duty applications. Suitable for low-emission engines.

20L	8330636	60L	8330841	205L	1047698
-----	---------	-----	---------	------	---------

EXTENDTECH 15W40

PRODUCT CODE 13536
MINERAL

SPECIFICATIONS

ACEA - E5 Level
API - CH-4/SJ
MACK - EO-M PLUS
MAN - M3275-1
MB - 228.3
VOLVO - VDS-2

DESCRIPTION

Universal engine oil meeting the specifications of European and American manufacturers of heavy duty diesel. Suitable for Euro II, Euro III and some Euro IV engines, but not for Euro IV with DPf.

20L	8310850	205L	8311154
60L	8311055	1000L	8311253

GUARDECH 15W40 SHPD

PRODUCT CODE 1236
MINERAL

SPECIFICATIONS

ACEA - E3-96 Issue 4
API - CG-4/SJ
MACK - EO-L
MAN - M3275-1
VOLVO - VDS-2
MB - 228.3

DESCRIPTION

This is a high-quality mineral oil delivering protection to all diesel engines. It can be used all year round in the toughest conditions. Its high resistance against ageing results in long drain periods.

1L	8300905	20L	8304033	205L	8304330
5L	8301001	60L	8304231	1000L	8304439

GUARDECH 20W50 SHPD

PRODUCT CODE 1247
MINERAL

SPECIFICATIONS

ACEA - E3-96 Issue 4
API - CG-4/SJ
MACK - EO-L
MAN - M3275-1
MB - 228.3
VOLVO - VDS-2

DESCRIPTION

This is a high-quality mineral oil delivering protection to all diesel engines. It can be used all year round in the toughest conditions. Its high resistance against ageing results in long drain periods.

1L	8301100	20L	8305238	205L	8305535
5L	8301209	60L	8305436	1000L	8305634

GUARDECH 15W40 PLUS CF-4

PRODUCT CODE 13236
MINERAL

SPECIFICATIONS

ACEA - E2-level
API - CF-4/SJ
CATERPILLAR - TO-2
MB - 228.1
VOLVO - VDS level

DESCRIPTION

High-quality universal engine oil of the latest generation for gasoline, diesel, and mixed fleets. It has good detergent and dispersant properties and a good capacity to neutralize acid.

20L	8319044	205L	8319341
60L	8319242	1000L	8319440

GUARDECH 15W40 CF-4

PRODUCT CODE 11236
MINERAL

SPECIFICATIONS

API - CF-4/SG
CATERPILLAR - TO-2
MAN - 271
MB - 227.1
VOLVO - VDS level

DESCRIPTION

Universal motor oil for 4-stroke gasoline and diesel engines between 1989 and 1994. It has high resistance to oxidation, good detergent and dispersant properties and high lubricity

1L	8308901	20L	8317248	205L	8317545
5L	8309007	60L	8317446	1000L	8317644

GUARDECH 20W50 CF-4

PRODUCT CODE 11247
MINERAL

SPECIFICATIONS

API - CF-4/SG
CATERPILLAR - TO-2
MAN - 271
MB - 227.1
VOLVO - VDS level

DESCRIPTION

Universal motor oil for 4-stroke gasoline and diesel engines between 1989 and 1994. It has high resistance to oxidation, good detergent and dispersant properties and high lubricity.

20L	8317842	205L	8318146
60L	8318047	1000L	8318245

GUARDECH 10W CF-4/SG

PRODUCT CODE 21201
MINERAL

SPECIFICATIONS

API - CF-4/SG
CATERPILLAR - TO-2
MAN - 270
MB - 228
ZF - TE-ML 03B
ZF - TE-ML 05K

DESCRIPTION

Universal mineral oil of high quality, suitable for diesel engines (supercharged or naturally aspirated) and gasoline engines operating in cold climatic conditions.

20L	8329098	205L	8331077
60L	8330971	1000L	8331176

GUARDECH 20W CF-4/SG

PRODUCT CODE 21202
MINERAL

SPECIFICATIONS

API - CF-4/SG
CATERPILLAR - TO-2
MB - 228
ZF - TE-ML 03A
ZF - TE-ML 06A
ZF - TE-ML 07D

DESCRIPTION

Universal mineral oil of high quality, suitable for diesel engines (supercharged or naturally aspirated) and gasoline engines operating in cold climatic conditions.

20L	8324079	205L	8324277
60L	8324178	1000L	8324376

GUARDECH SAE 30 CF-4/SG

PRODUCT CODE 21203
MINERAL

SPECIFICATIONS

ALLISON - C4
API - CF-4/SG
CATERPILLAR - TO-2
MB - 228
ZF - TE-ML 03A
ZF - TE-ML 07D

DESCRIPTION

Universal mineral oil of high quality, suitable for diesel engines (supercharged or naturally aspirated) and gasoline engines operating in cold climatic conditions.

20L	8339905	205L	8332432
60L	8331374	1000L	8331473

GUARDECH SAE 40 CF-4/SG

PRODUCT CODE 21204
MINERAL



SPECIFICATIONS

API - CF-4/SG
MB - 227

DESCRIPTION

Monograde motor oil of high quality, suitable for diesel engines (supercharged or naturally aspirated) and gasoline engines in all circumstances.

1L	8303111	20L	8311062	205L	8311369
5L	8303210	60L	8311260	1000L	8311468

GUARDECH SAE 50 CF-4/SG

PRODUCT CODE 21205
MINERAL



SPECIFICATIONS

API - CF-4/SG
MB - 227

DESCRIPTION

Monograde oil, mainly used in diesel engines with or without turbo between 1989 and 1994. It has high resistance to oxydation, good detergent and dispersant properties, and high lubricity.

1L	8303319	20L	8311666	205L	8311963
5L	8303418	60L	8311864	1000L	8312069

OFFICIALTECH 75W90 GL 5

PRODUCT CODE 2315
FULL SYNTHETIC



SPECIFICATIONS

API - GL-5
SAE - J 2360
VOLVO - 97312
MAN - 342 S1
MB - 235.8
SCANIA - STO 2:0A FS

DESCRIPTION

Full synthetic lubricant which can be used in a wide field of driveline applications. It is particularly suited for the most recent specifications of many Heavy Duty component manufacturers.

5L	8333262	60L	8330063	1000L	8334160
20L	8333965	205L	8334061		

OFFICIALTECH 85W90 M GL 5

PRODUCT CODE 23310
MINERAL



SPECIFICATIONS

API - GL-5
MAN - 342 M-1
VOLVO - 97310
VOLVO - 97316
ZF - TE-ML 07A
MB - 235.0

DESCRIPTION

This gear oil is specifically designed to meet the Mercedes Benz 235.0 requirement. It has excellent properties during prolonged operation under heavy load and high temperatures.

20L	8318986	205L	8319181
60L	8319082	1000L	8319280

OFFICIALTECH 80W90 LS GL 5

PRODUCT CODE 3350
MINERAL



SPECIFICATIONS

API - GL-5
ZF - TE-ML 08
ZF - TE-ML 05C
ZF - TE-ML 12C
ZF - TE-ML 21C

DESCRIPTION

This lubricant is based on a specific transmission additive technology destined for axles equipped with Limited Slip mechanisms. This formulation offers excellent protection against wear.

20L	8330964	205L	8331169
60L	8331060	1000L	8331268

VITALTECH 75W90 GL 5

PRODUCT CODE 2305
FULL SYNTHETIC



SPECIFICATIONS

API - GL-5
API - MT-1
MAN - 341 Z-2
MAN - 342 M-3
MB - 235.8
SCANIA - STO 1:0

DESCRIPTION

Full synthetic transmission oil for a wide field of applications. Suitable for synchronized gear boxes and heavily loaded differentials and ensures perfect service in the most difficult conditions.

1L	8303906	20L	8304453	1000L	8304859
4L	8323669	60L	8304651		
5L	8304002	205L	8304750		

VITALTECH 80W90 GL 5

PRODUCT CODE 2312
SEMI SYNTHETIC



SPECIFICATIONS

API - GL-5
API - MT-1
MAN - 341 E-2
MAN - 342 M-2
MB - 235
SCANIA - STO 1:0

DESCRIPTION

A synthetic based lubricant for transmissions, which distinguishes itself from the classic, hypoid GL 5-oils by its multifunctional character and its exceptional oxidation and thermal stability.

20L	8308055	205L	8308352
60L	8308253	1000L	8308451

EXTENDTECH 75W90 GL 5

PRODUCT CODE 2209
SEMI SYNTHETIC



SPECIFICATIONS

API - GL-5
MIL - MIL-L-2105 D

DESCRIPTION

Semi synthetic transmission oil with an exceptionally high viscosity index. It exhibits excellent fluidity at low temperatures and ensures a long life of the oil and gears.

1L	8303302	20L	8302053	1000L	8302459
4L	8323461	60L	8302251		
5L	8303500	205L	8302350		

EXTENDTECH 80W90 GL 5

PRODUCT CODE 2308
MINERAL



SPECIFICATIONS

API - GL-5
MAN - 342 M-1
MAN - 342 M-2
ZF - TE-ML 05A
ZF - TE-ML 16C
ZF - TE-ML 19B

DESCRIPTION

This is an extreme-pressure lubricant for gear boxes, specifically formulated to satisfy the highest service conditions: high speed, shockloads and high torque at low speeds.

1L	8304309	20L	8306259	1000L	8306655
4L	8323867	60L	8306457		
5L	8304507	205L	8306556		

EXTENDTECH 80W140 GL5

PRODUCT CODE 2311
MINERAL



SPECIFICATIONS

API - GL-5
MAN - 342 M-2
ZF - TE-ML 05A
ZF - TE-ML 12E
ZF - TE-ML 16D
ZF - TE-ML 19B

DESCRIPTION

This is an extreme-pressure lubricant for gear boxes, specially formulated to satisfy the highest service conditions: high speed, shockloads and high torque at low speeds.

20L	8307454	205L	8307751		
60L	8307652	1000L	8307850		

EXTENDTECH 85W140 GL 5

PRODUCT CODE 2309
MINERAL



SPECIFICATIONS

API - GL-5
ZF - TE-ML 05A
ZF - TE-ML 12E
ZF - TE-ML 16D
ZF - TE-ML 17B
ZF - TE-ML 19B

DESCRIPTION

This is an extreme-pressure lubricant for gear boxes, specially formulated to satisfy the highest service conditions: high speed, shockloads and high torque at low speeds.

1L	8304606	20L	8306853	205L	8307157
5L	8304705	60L	8307058	1000L	8307256

GUARDECH 80W GL 4

PRODUCT CODE 2201
MINERAL



SPECIFICATIONS

API - GL-4
MIL - MIL-L-2105

DESCRIPTION

This is a gear oil for mechanical transmissions with moderate "extreme pressure" characteristics and is specifically developed to avoid corrosion of copper alloys.

1L	8303104	60L	8309847	1000L	8300059
20L	8309649	205L	8309946		

GUARDECH 80W90 GL 4

PRODUCT CODE 2208
MINERAL



SPECIFICATIONS

API - GL-4
MIL - MIL-L-2105

DESCRIPTION

This is a gear oil for mechanical transmissions with moderate "extreme pressure" characteristics and is specifically developed to avoid corrosion of copper alloys.

20L	8301452	205L	8301759		
60L	8301650	1000L	8301858		

GUARDECH 80W90 GL 1&3

PRODUCT CODE 2108
MINERAL



SPECIFICATIONS

API - GL-1
API - GL-3
VOLVO - 97305

DESCRIPTION

This is a lubricant for gearboxes and rear axles with conical teeth or screw type. This is made with highly refined base oils and anti-wear additives and an additive to lower the pour point.

20L	8309045	205L	8309342		
60L	8309243	1000L	8309441		

GUARDECH SAE 140 GL 1&3

PRODUCT CODE 2104
MINERAL



SPECIFICATIONS

API - GL-1
API - GL-3

DESCRIPTION

This is a lubricant for gearboxes and rear axles with conical teeth or screw type. This is made with highly refined base oils and anti-wear additives and an additive to lower the pour point.

1L	8303005	60L	8308642	1000L	8308840
20L	8308444	205L	8308741		

VITALTECH MULTI VEHICLE ATF

PRODUCT CODE 3010
FULL SYNTHETIC



SPECIFICATIONS

AISIN-WARNER - JWS 3309
CHRYSLER - ATF +3 AND +4
FORD - MERCON V
GM - DEXRON III-H
TOYOTA - TYPE T-IV
VW - G 055 025

DESCRIPTION

A full synthetic lubricant based on carefully selected very highly refined base oils for automatic transmissions, meeting the requirements of most American, Japanese and European manufacturers.

1L	8305603	20L	8304064	205L	8304361
5L	8305702	60L	8304262	1000L	8304460

VITALTECH ATF D III

PRODUCT CODE 3006
SEMI SYNTHETIC



SPECIFICATIONS

FORD - MERCON
GM - 6417-M DEXRON III-G
MAN - 339 V1/Z1
MB - 236.5
MB - 236.9
VOITH - H55.6335xx

DESCRIPTION

Semi synthetic oil suitable for most automatic transmissions. Its optimal fluidity at low temperatures and exceptional frictional characteristics provide smooth switching and driving comfort.

1L	8305306	20L	8302862	205L	8303166
5L	8305405	60L	8303067	1000L	8303265

EXTENDTECH ATF D II

PRODUCT CODE 3003
MINERAL



SPECIFICATIONS

ALLISON - C4
FORD - M2C-138CJ, Mercon
GM - 6137-M DEXRON II-D
MAN - 339 V1/Z1
MB - 236.7
VOITH - H55.6335xx

DESCRIPTION

This is an oil with a high viscosity index for automatic transmissions. It has a high chemical stability, increased anti-wear properties and an excellent resistance to ageing.

1L	8305108	20L	8302268	205L	8302565
5L	8305207	60L	8302466	1000L	8302664

TRACTOFLUID 50

PRODUCT CODE 3119
FULL SYNTHETIC



SPECIFICATIONS

CASE - MAT 3540
JD - J20 D
MF - M 1145
VALTRA - G2-B10
VOLVO - 97304/WB102
ZF - TE-ML 06D

DESCRIPTION

Full synthetic oil for outstanding performance of wet brakes in a wide range of temperatures under all operating conditions. It protects against wear and reduce friction, and also prevent brake noise.

20L	8323119	205L	8324475
60L	8324772	1000L	8324697

TRACTOFLUID 100

PRODUCT CODE 3120
MINERAL



SPECIFICATIONS

API - GL-4
CASE - IH HY-TRAN B6
CASE - IH HY-TRAN PLUS
FORD - ESN-M2C-41 A/B
MF - M 1110
MF - M 1141

DESCRIPTION

Special oil for automatic transmissions, hydraulic systems and brakes of tractors, forklifts and off-road equipment. This Universal Tractor Transmission Oil (UTTO) should never be used for the engine.

20L	8306464	205L	8306761
60L	8306662	1000L	8306860

TRACTOFLUID 170

PRODUCT CODE 3121
MINERAL



SPECIFICATIONS

ALLISON - C3/C4
API - GL-4
FORD - ESN-M2C-134 C/D
FORD - ESN-M2C-86 C
JD - J20 C/D
MF - M 1143

DESCRIPTION

Special oil for automatic transmissions, hydraulic systems and brakes of tractors, forklifts and off-road equipment. This Universal Tractor Transmission Oil (UTTO) should never be used for the engine.

20L	8307065	205L	8307362
60L	8307263	1000L	8307461

TRACTOFLUID 170 BM

PRODUCT CODE 23121
MINERAL



SPECIFICATIONS

ALLISON - C4
API - GL-4
CASE - MAT 3540
JD - J20 C/D
MF - M 1145
VOLVO - 97303/WB101

DESCRIPTION

Special oil intended for automatic transmissions, hydraulic systems, wet brakes, converters for tractors, forklifts and different off-highway equipment.

5L	8328664	60L	8312465	1000L	8312663
20L	8312267	205L	8312564		

TRACTOFLUID 400

PRODUCT CODE 3122
MINERAL



SPECIFICATIONS

ALLISON - C3/C4
API - GL-4
CASE - MS1205
CASE - MS1206
FORD - ESN-M2C-86 A/B
MF - M 1135

DESCRIPTION

Special oil for automatic transmissions, hydraulic systems and brakes of tractors, forklifts and off-road equipment. This Universal Tractor Transmission Oil (UTTO) should never be used for the engine.

20L	8307669	205L	8307966
60L	8307867	1000L	8308062

TRACTOFLUID 500

PRODUCT CODE 3123
MINERAL



SPECIFICATIONS

ALLISON - C4
CATERPILLAR - TO-4
KOMATSU - KES 07.868.1
ALLISON - TES 439
ZF - TE-ML 03C
ZF - TE-ML 07F

DESCRIPTION

This is a lubricant, specifically formulated to meet the requirements of Caterpillar for use in transmissions, final drives and wet brakes (Cat TDTO).

20L	8308260	205L	8308567
60L	8308468	1000L	8308666

TRACTOFLUID 600

PRODUCT CODE 3124
MINERAL



SPECIFICATIONS

ALLISON - C4
API - GL-4
CATERPILLAR - TO-4
EATON VICKERS - M-2950-S
ISO - 220
KOMATSU - KES 07.868.1

DESCRIPTION

This is a lubricant, which is specifically formulated to satisfy the requirements of Caterpillar for use in transmissions, final drives and wet brakes (Cat TDTO).

20L	8317880	205L	8318184
60L	8318085	1000L	8318283

TDTO SAE 10W

PRODUCT CODE 3125
MINERAL



SPECIFICATIONS

ALLISON - C4
CATERPILLAR - TO-4
EATON VICKERS - M-2950-S
ISO - 32
KOMATSU - KES 07.868.1
ZF - TE-ML 03C

DESCRIPTION

This is a lubricant, which has been specifically formulated to satisfy the requirements of Caterpillar TDTO (Transmission/Drive Train Oil).

20L	8325403	205L	8315299
60L	8319198	1000L	8335143

CORS COMBI 10W30 LA

PRODUCT CODE 3500
SEMI SYNTHETIC



SPECIFICATIONS

ACEA - E9/E7/E5
API - CJ-4/CI-4+/CI-4/CH-4
CATERPILLAR - TO-4 (SAE10W,30)
ISO - VG 46(After 100h)/HV
JASO - DH-1/DH-2
ZF - TE-ML 07D

DESCRIPTION

Used for the lubrication in construction, agriculture and public works machines. It offers fuel saving and covers applications such as engines, hydraulic systems, manual and powershift transmissions.

20L	8332159	205L	8324499
60L	8332258	1000L	8324291

S.T.O.U. 10W30

PRODUCT CODE 1425
MINERAL



SPECIFICATIONS

ALLISON - C4 (Agriculture applic.)
API - CG-4
API - GL-4
FORD - ESN-M2C159 B/C
JD - J27
MF - M 1145

DESCRIPTION

Universal multigrade oil for engines, transmissions, wet brakes and hydraulic systems of agricultural tractors.

20L	8306433	205L	8306730
60L	8306631	1000L	8306839

S.T.O.U. 10W40

PRODUCT CODE 1426
SEMI SYNTHETIC



SPECIFICATIONS

ALLISON - C4 (Agriculture applic.)
API - CG-4
API - GL-4
FORD - ESN-M2C159 B/C
JD - J27
MF - M 1145

DESCRIPTION

This is a semi synthetic lubricant based on carefully selected highly refined base oils for engines, transmissions, wet brakes and hydraulic systems of agricultural tractors.

20L	8307034	205L	8307331
60L	8307232	1000L	8307430

S.T.O.U. 15W30

PRODUCT CODE 1435
MINERAL



SPECIFICATIONS

ALLISON - C4 (Agriculture applic.)
API - CG-4
API - GL-4
FORD - ESN-M2C159 B/C
JD - J27
MF - M 1145

DESCRIPTION

Universal multigrade oil for engines, transmissions, wet brakes and hydraulic systems of agricultural tractors.

20L	8307638	205L	8307935
60L	8307836	1000L	8308031

S.T.O.U. 15W40

PRODUCT CODE 1436
MINERAL



SPECIFICATIONS

ALLISON - C4 (Agriculture applic.)
API - CG-4
API - GL-4
FORD - ESN-M2C159 B/C
JD - J27
MF - M 1145

DESCRIPTION

Universal multigrade oil for engines, transmissions, wet brakes and hydraulic systems of agricultural tractors.

20L	8308239	205L	8308536
60L	8308437	1000L	8308635

SUPER CPO 10W40

PRODUCT CODE 1726
SEMI SYNTHETIC



SPECIFICATIONS

API - CG-4
API - GL-5 (Low speed/high torque)
EATON VICKERS - I-280-S
FORD - ESN-M2C159 B/C
JD - J27
MF - M 1145

DESCRIPTION

Semi synthetic oil for use in public works. It meets the specifications of most manufacturers, both in terms of engine and gear oils. Its high viscosity index allows the use in all weather conditions.

20L	8300646	205L	8300943
60L	8300844	1000L	8301049

AROW ISO 22

PRODUCT CODE 4004
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HM
DENISON - HF-2
DIN - 51524 Part 2
EATON VICKERS - I-286-S
ISO - 11158, HM
ISO - 6743-4, HM

DESCRIPTION

A mineral oil, specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.

20L	8300677	205L	8300974
60L	8300875	1000L	8301070

AROW ISO 32

PRODUCT CODE 4005
MINERAL



SPECIFICATIONS

DENISON - HF-0, HF-1, HF-2A mineral oil, specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.
DIN - 51524 Part 2
EATON - E-FDGN-TB002-E
ISO - 11158, HM
ISO - 6743-4, HM
BOSCH REXROTH - RDE 90235

DESCRIPTION

A mineral oil, specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.

5L	8320682	60L	8301476	1000L	8301674
20L	8301278	205L	8301575		

AROW ISO 46

PRODUCT CODE 4006
MINERAL



SPECIFICATIONS

DENISON - HF-0, HF-1, HF-2A mineral oil specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.
DIN - 51524 Part 2
EATON - E-FDGN-TB002-E
ISO - 11158, HM
ISO - 6743-4, HM
BOSCH REXROTH - RDE 90235

DESCRIPTION

A mineral oil specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.

1L	8306105	20L	8301872	205L	8302176
5L	8306204	60L	8302077	1000L	8302275

AROW ISO 68

PRODUCT CODE 4007
MINERAL



SPECIFICATIONS

DENISON - HF-0, HF-1, HF-2A mineral oil specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.
DIN - 51524 Part 2
EATON - E-FDGN-TB002-E
ISO - 11158, HM
ISO - 6743-4, HM
BOSCH REXROTH - RDE 90235

DESCRIPTION

A mineral oil specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.

5L	8328367	60L	8302671	1000L	8302879
20L	8302473	205L	8302770		

AROW ISO 100

PRODUCT CODE 4008
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HM
DENISON - HF-2
DIN - 51524 Part 2
EATON VICKERS - I-286-S
ISO - 11158, HM
ISO - 6743-4, HM

DESCRIPTION

A mineral oil, specifically designed to meet the requirements of the most important manufacturers of hydraulic equipment. It contains anti-wear, anti-oxidant, anti-corrosion and anti-foam additives.

20L	8303074	205L	8303371
60L	8303272	1000L	8303470

AROW SAE 10W

PRODUCT CODE 4101
MINERAL



SPECIFICATIONS

ALLISON - C3
API - CD/SF
API - CE

DESCRIPTION

Detergent hydraulic oil significantly reducing, due to its dispersant properties, deposits and sludge formation. Its high zinc content ensures excellent anti-wear and anti-oxidation characteristics.

20L	8315398	205L	8315596
60L	8315497	1000L	8315695

AROW HV ISO 22

PRODUCT CODE 4404
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HV
DENISON - HF-2
DIN - 51524 Part 3
EATON VICKERS - I-286-S
ISO - 11158, HV
ISO - 6743-4, HV

DESCRIPTION

A high viscosity index paraffinic oil, based on selected ingredients, specifically intended for use in hydraulic circuits. Superior performance in keeping the system clean.

20L	8304484	205L	8304781
60L	8304682	1000L	8304880

AROW HV ISO 32

PRODUCT CODE 4405
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HV
DENISON - HF-0, HF-1, HF-2
DIN - 51524 Part 3
EATON VICKERS - I-286-S
ISO - 11158, HV
ISO - 6743-4, HV

DESCRIPTION

A high viscosity index paraffinic oil, based on selected ingredients, especially intended for use in hydraulic circuits. Superior performance in keeping the system clean.

5L	8336546	60L	8305283	1000L	8305481
20L	8305085	205L	8305382		

AROW HV ISO 46

PRODUCT CODE 4406
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HV
DENISON - HF-0, HF-1, HF-2
DIN - 51524 Part 3
EATON VICKERS - I-286-S
ISO - 11158, HV
ISO - 6743-4, HV

DESCRIPTION

A high viscosity index paraffinic oil for hydraulic circuits. Superior performance in keeping the system clean. It has good filterability, water separation, and quick air release characteristics.

1L	8306303	20L	8305689	205L	8305986
5L	8306402	60L	8305887	1000L	8306082

AROW HV ISO 68

PRODUCT CODE 4407
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HV
DENISON - HF-0, HF-1, HF-2
DIN - 51524 Part 3
EATON VICKERS - I-286-S
ISO - 11158, HV
ISO - 6743-4, HV

DESCRIPTION

A high viscosity index paraffinic oil for hydraulic circuits. Superior performance in keeping the system clean. It has good filterability, water separation, and quick air release characteristics.

5L	8336744	60L	8306488	1000L	8306686
20L	8306280	205L	8306587		

AROW HV ISO 100

PRODUCT CODE 4408
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HV
DENISON - HF-2
DIN - 51524 Part 3
EATON VICKERS - I-286-S
ISO - 11158, HV
ISO - 6743-4, HV
AFNOR - NF E 48-603 HV

DESCRIPTION

A high viscosity index paraffinic oil for hydraulic circuits. Superior performance in keeping the system clean. It has good filterability, water separation, and quick air release characteristics.

20L	8306884	205L	8307188
60L	8307089	1000L	8307287

AROW HVLPD ISO 46

PRODUCT CODE 4426
MINERAL



SPECIFICATIONS

DIN - 51524 T3 HVLPD
ISO - 6743-4 CLASS L-HV
HV-LP

DESCRIPTION

A mineral hydraulic oil, containing selected wear and oxidation inhibiting additives. It is able to absorb certain quantities of water. It has superior viscosity/temperature characteristics.

20L	8338823	205L	8339028
60L	8338922	1000L	8339127

AROW XHV ISO 2268

PRODUCT CODE 3301
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HV
DENISON - HF-2
DIN - 51524 Part 3
EATON VICKERS - I-286-S
ISO - 11158, HV
ISO - 6743-4, HV

DESCRIPTION

This hydraulic fluid offers complete system protection and improved fuel economy. It establishes a high-tech oil film, which offers additional wear, scuffing & pitting resistance.

20L	8330674	205L	8330872
60L	8330773	1000L	8338243

AROW XHV ISO 32

PRODUCT CODE 24405
MINERAL



SPECIFICATIONS

AFNOR - NF E 48-603 HV
DENISON - HF-2
DIN - 51524 Part 3
EATON VICKERS - I-286-S
ISO - 11158, HV
ISO - 6743-4, HV

DESCRIPTION

This is an oil of paraffinic nature with a high viscosity index, which is specially designed to be used in hydraulic circuits.

1000L	8330001
-------	---------

BIO HYDRAULIC FLUID 2268

PRODUCT CODE 5502



SPECIFICATIONS

DIN - 51524 Part 3
ISO - 6743-4, HETG

DESCRIPTION

This is a biologically degradable hydraulic oil based on carefully refined vegetable oils and an adapted additive package. It corresponds to ISO VG 32, 46 and 68.

20L	8314841	205L	8315145
60L	8315046	1000L	8315244

BRAKE FLUID DOT 5.1

PRODUCT CODE 5038



SPECIFICATIONS

FMVSS - 116 DOT 4
 FMVSS - 116 DOT 5.1
 FMVSS - 116 DOT3
 ISO - 4925 Class 3&4
 ISO - 4925 Class 5.1
 SAE - J 1704

DESCRIPTION

Synthetic brake fluid, intended for hydraulic brake systems, where a superior quality is required. Its composition provides a high chemical stability, excellent resistance against residues, high resistance against oxidation and can be used with all materials, normally used in brake systems.

1L	8308307
----	---------

BRAKE FLUID DOT 5.1

PRODUCT CODE 5075



SPECIFICATIONS

FMVSS - 116 DOT 4
 FMVSS - 116 DOT 5.1
 FMVSS - 116 DOT3
 ISO - 4925 Class 3&4
 ISO - 4925 Class 5.1
 SAE - J 1704

DESCRIPTION

Synthetic brake fluid, intended for hydraulic brake systems, where a superior quality is required. Its composition provides a high chemical stability, excellent resistance against residues, high resistance against oxidation and can be used with all materials, normally used in brake systems.

20L	8312441	205L	8312748
60L	8312649	1000L	8312847

BRAKE FLUID DOT 3&4

PRODUCT CODE 5039



SPECIFICATIONS

FMVSS - 116 DOT 4
 FMVSS - 116 DOT3
 ISO - 4925 Class 3&4
 SAE - J 1703
 SAE - J 1704

DESCRIPTION

Brake fluid, intended for hydraulic brake systems. Its composition provides a high chemical stability, excellent resistance against residue formation, very good stability towards oxidation and is compatible with all materials present in the circuit.

250ML	8307607	1L	8307805
500ML	8307706	5L	8311482

BRAKE FLUID DOT 3&4

PRODUCT CODE 5015



SPECIFICATIONS

FMVSS - 116 DOT 4
 FMVSS - 116 DOT3
 ISO - 4925 Class 3&4
 SAE - J 1703
 SAE - J 1704

DESCRIPTION

Brake fluid, intended for hydraulic brake systems. Its composition provides a high chemical stability, excellent resistance against residue formation, very good stability towards oxidation and is compatible with all materials present in the circuit.

20L	8307690	205L	8307997
60L	8307898	1000L	8308093

ANTI-FREEZE LONGLIFE G13

PRODUCT CODE 50002



SPECIFICATIONS

ASTM - D3306
 VW - TL 774-J

DESCRIPTION

An ethylene glycol/glycerine based antifreeze. It is nitrite, amine, phosphate and borate free and contains silicates. The Hybrid Organic Acid inhibitor (HOAT) offers permanent system protection.

1L	8323584	20L	8323980	205L	8324185
4L	8323782	60L	8324086		

COOLANT -36°C LONGLIFE G13

PRODUCT CODE 50102



SPECIFICATIONS

ASTM - D3306
 VW - TL 774-J

DESCRIPTION

An ethylene glycol/glycerine based coolant. It is nitrite, amine, phosphate and borate free and contains silicates. The Hybrid Organic Acid inhibitor (HOAT) offers permanent system protection.

1L	8327483	20L	8327681	205L	8327889
4L	8327582	60L	8327780	1000L	1044219

ANTI-FREEZE LONGLIFE G12+

PRODUCT CODE 50001



SPECIFICATIONS

ASTM - D3306
 ASTM - D4985
 MAN - 324 SNF
 MB - 325.3
 SAE - J1034
 VW - TL 774-F

DESCRIPTION

An ethylene glycol based antifreeze. It is nitrite, amine, phosphate, borate and silicate free. It contains Organic Acid inhibitor Technology (OAT) offering permanent cooling system protection.

1L	8315985	20L	8311727	205L	8310928
4L	8316081	60L	8311826		

COOLANT-36°C LONGLIFE G12+

PRODUCT CODE 50101



SPECIFICATIONS

ASTM - D3306
 ASTM - D4985
 MAN - 324 SNF
 MB - 325.3
 SAE - J1034
 VW - TL 774-F

DESCRIPTION

An ethylene glycol based coolant. It is nitrite, amine, phosphate, borate and silicate free. It contains Organic Acid inhibitor (OAT) offering permanent cooling system protection.

1L	8325885	20L	8326080	205L	8326288
4L	8325984	60L	8326189	1000L	1044045

ANTI-FREEZE STANDARD G11

PRODUCT CODE 50000



SPECIFICATIONS

ASTM - D3306
 ASTM - D4985
 MAN - 324 NF
 MB - 325
 SAE - J1034
 VW - TL 774-C

DESCRIPTION

An ethylene glycol based antifreeze. It is nitrite, amine and phosphate free and includes borate and silicate. It contains Inorganic Acid inhibitor (IAT) offering permanent cooling system protection.

1L	8325083	20L	8325281	205L	8325489
4L	8325182	60L	8325380		

COOLANT -36°C STANDARD G11

PRODUCT CODE 50100



SPECIFICATIONS

ASTM - D3306
 ASTM - D4985
 MAN - 324 NF
 MB - 325
 SAE - J1034
 VW - TL 774-C

DESCRIPTION

An ethylene glycol based coolant. It is nitrite, amine and phosphate free and includes borate and silicate. It contains Inorganic Acid inhibitor (IAT) offering permanent cooling system protection.

1L	8326684	20L	8326882	205L	8327087
4L	8326783	60L	8326981		

WINDSCREEN CONCENTRATE

PRODUCT CODE 50200



SPECIFICATIONS

ASTM - D1177

DESCRIPTION

An undiluted powerful windscreen washer antifreeze concentrate that can be used during the whole year with frost protection at your choice once diluted with water.

1L	8322785	20L	8323188	1000L	8323485
4L	8322983	60L	8323287		
5L	1043343	205L	8323386		

WINDSCREEN -22°C READY TO USE

PRODUCT CODE 50210



SPECIFICATIONS

ASTM - D1177

DESCRIPTION

A diluted powerful windscreen washer ready to use that can be used during the whole year with frost protection at -22°C. Special formula protects against re-icing, quickly removes road grime. It has an excellent cleaning action, together with a nice citrus odor.

1L	8324383	5L	1043344	20L	8324789
----	---------	----	---------	-----	---------

WINDSCREEN WASHER SUMMER READY TO USE

PRODUCT CODE 50220



SPECIFICATIONS

ASTM - D1177

DESCRIPTION

A powerful windscreen washer ready to use that can be used with outside temperatures not below 0 °C. Special formula with anti-insect action, which is indispensable in summer period.

5L	1043345
----	---------

DIESEL PARTICULATE FILTER CLEANER

PRODUCT CODE 70312



DESCRIPTION

This product is an organo-metallic diesel fuel additive to be used as a catalyst for the regeneration of diesel particulate filters.

325ML	8315282
-------	---------

COLDCLEANER

PRODUCT CODE 5002



SPECIFICATIONS

ISO - 6743/10

DESCRIPTION

This is a solvent and cleaning product, based on an aliphatic solvent, emulsifiers and tensio-actives. It is emulsifiable with water and suitable for the removal of oily, greasy and asphalt pollutions.

20L	8307096	205L	8307393
60L	8307294	1000L	8307492

LITHIUM COMPLEX EP 2

PRODUCT CODE 9141
MINERAL



SPECIFICATIONS

DIN - 51502
DIN - KP2.5N-30
ISO - 12924
ISO - L-XC(F)DIB2.5

DESCRIPTION

Lithium-Complex grease with "Extreme Pressure" additives without lead, especially developed for the lubrication of roller bearings of vehicles.

400GR	8321993	50KG	8322198
18KG	8322099	180KG	8322297

LITHIUM GREASE EP 1

PRODUCT CODE 9126
MINERAL



SPECIFICATIONS

DIN - 51502
DIN - KP1K-30
ISO - 6743
ISO - L-XCCFB1

DESCRIPTION

This is a grease with high-pressure properties, for heavily loaded applications in general. This grease has a good oxidation stability and anti-wear properties. It ensures long-lasting lubrication.

18KG	8330803
------	---------

LITHIUM GREASE EP 2

PRODUCT CODE 9130
MINERAL



SPECIFICATIONS

DIN - 51502
DIN - KP2K-30
ISO - 6743
ISO - L-XCCIB2

DESCRIPTION

This is a lithium thickened lubricating grease. It contains antioxidants, corrosion inhibitors and EP/AW additives. It is a typical multipurpose EP grease that can be used in various applications.

400GR	8321498	5KG	8339462	50KG	8321795
1KG	8321597	18KG	8321696	180KG	8321894

LITHIUM GREASE EP 3

PRODUCT CODE 9115
MINERAL



SPECIFICATIONS

DIN - 51502
DIN - KP3K-30
ISO - 6743
ISO - L-XCCFB3

DESCRIPTION

This is a grease with high-pressure properties, for heavily loaded applications. This grease has a good oxidation stability and anti-wear properties. It can ensure long-lasting lubrication.

400GR	8330407	18KG	8330506	180KG	8330605
-------	---------	------	---------	-------	---------

MULTIPURPOSE GREASE 2

PRODUCT CODE 9100
MINERAL



SPECIFICATIONS

DIN - 51502
DIN - K2K-30
ISO - 6743
ISO - L-XCCEA2

DESCRIPTION

Lubricating grease for general applications. It is water resistant and has good temperature properties. It stays pumpable at low temperatures making it suitable for bearing lubrication.

400GR	8320590	50KG	8320897
18KG	8320798	180KG	8320996

MULTIPURPOSE GREASE 3

PRODUCT CODE 9103
MINERAL

SPECIFICATIONS

DIN - 51502
DIN - K3K-30
ISO - 6743
ISO - L-XCCFA3

DESCRIPTION

Lubricating grease for general applications. It has good oxidation stability and corrosion protection. It provides temperature protection within a certain range and can be used in wet environment.

18KG 8330308

ALL-PURPOSE EP NR. 0

PRODUCT CODE 9182
MINERAL

SPECIFICATIONS

DIN - 51502
DIN - KP0K-30
ISO - 6743
ISO - L-XCCFB0

DESCRIPTION

This is a lithium thickened grease. It has antioxidants, corrosion inhibitors and EP/AW additives. It is a high quality multipurpose grease that is used in industrial and automotive applications.

1KG 8331404 50KG 8331503

ALL-PURPOSE EP NR. 00

PRODUCT CODE 9180
MINERAL

SPECIFICATIONS

DIN - 51502
DIN - KP00K-30
ISO - 6743
ISO - L-XCCHB00

DESCRIPTION

This is a lithium thickened grease. It contains antioxidants, corrosion inhibitors and EP/AW additives. It's a multipurpose EP grease which can be used in various applications.

18KG 8331107 50KG 8331206 180KG 8331305

CALCIUM LITHIUM EP2 HEAVY

PRODUCT CODE 9183
MINERAL

SPECIFICATIONS

DIN - 51502
DIN - KP2K-20
ISO - 12924
ISO - L-XB(F)CHB2

DESCRIPTION

This is a lithium calcium thickened grease. It contains antioxidants, corrosion inhibitors and EP/AW additives.

400GR 8331602 18KG 8331701 50KG 8331800

LITHIUM CALCIUM EP2 GREEN

PRODUCT CODE 9184
MINERAL

SPECIFICATIONS

DIN - 51502
DIN - KP2K-30
ISO - 12924
ISO - L-XC(F)CIB2

DESCRIPTION

This lithium-calcium grease is characterized by improved water resistance and rust protection. Also suitable for the lubrication of heavily loaded bearings running at medium speed.

400GR 8337529 50KG 8338021
18KG 8337925 180KG 8338120

LITHIUM GREASE EPA

PRODUCT CODE 9140
MINERAL

SPECIFICATIONS

DIN - 51350:4
DIN - KPF2K-30
ISO - 6743
ISO - L-XCCEB2

DESCRIPTION

This is a lithium thickened grease with antioxidants, corrosion inhibitors and EP/AW additives. It is a multipurpose "moly" grease which can be used in various applications.

400GR 8336706 18KG 8333606 50KG 8333705

MULTI MOLY GREASE 2

PRODUCT CODE 9120
MINERAL

SPECIFICATIONS

DIN - 51502
DIN - KPF2K-30
ISO - 6743
ISO - L-XCCIB2

DESCRIPTION

This is a multipurpose grease, containing molybdenum disulphide (MoS₂) that contributes to its extreme pressure and anti-wear characteristics, even at the heaviest loads and the most violent shocks.

400GR 8321092 50KG 8321290
18KG 8321191 180KG 8321399

HIGH TEMPERATURE GREASE 2

PRODUCT CODE 9150
MINERAL

SPECIFICATIONS

DIN - 51502
DIN - KP2N-30
ISO - 6743
ISO - L-XCDAB2

DESCRIPTION

This grease is based on high viscosity mineral base oils with high flash point. Bentonite is used as inorganic thickener that makes the product suitable for a wide range of temperatures.

18KG 8330902 50KG 8331008




OUR DIGITAL PLATFORMS

Connect with us on social media. Follow us and get updates delivered to your favorite social media channel. Scan the QR code!


OUR WEBSITE

Today's lubricants market is very complex which is why it is important to have the most up-to-date information available for distributors, workshops and individuals alike. Our website offers a perfect mix of complete Wolf Lubricants product information, advanced recommendation tools as well as the latest industry news & developments.

www.wolflubes.com

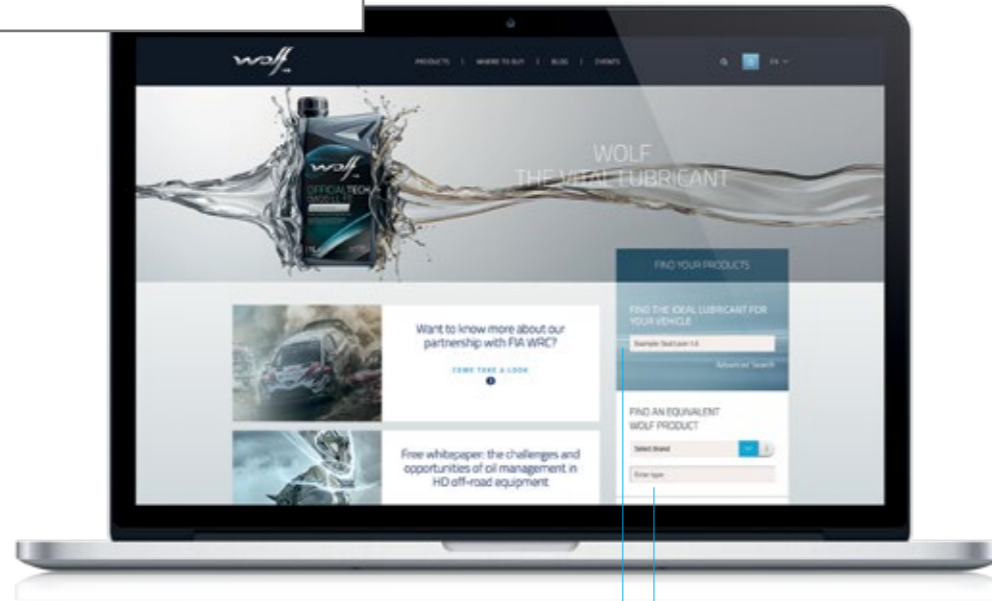

PRODUCT RECOMMENDATION TOOL

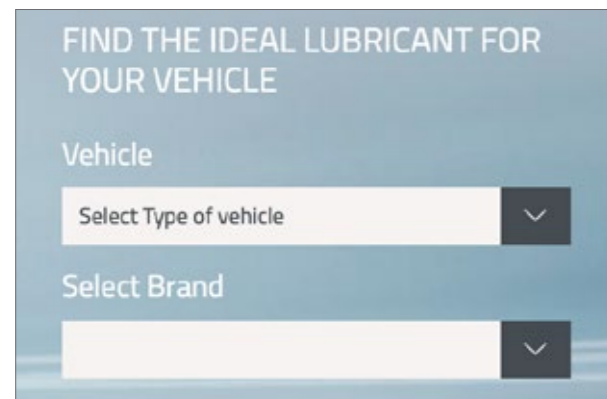


By using the Product Recommendation Tool you can find the most suitable oil for each application. The recommendation tool is based on the vehicle, model, type or brand and follows the OEM specifications.

OUR FACEBOOK & INSTAGRAM CHANNELS

Keep up with the latest novelties of Wolf Lubricants in the world of motorsport. We share up-to-date content related to our partnerships with WRC & Junior WRC such as rally highlights, interesting facts and contests, as well as key information about our products and the future of mobility.

Join us here:
[@wolflubes](https://www.facebook.com/wolflubes)
[@wolflubes_official](https://www.instagram.com/wolflubes_official)

EQUIVALENT FINDER

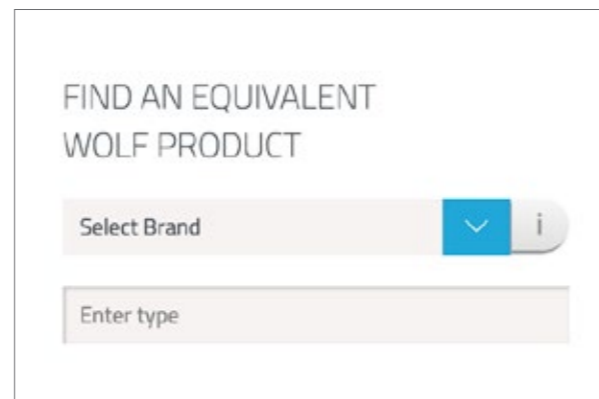

The Equivalent Finder allows you to match all the brands on the market to a Wolf equivalent. Find all the information you need to know on every specific product: applications, features, benefits, specifications, approvals, etc. After you have found the right product, you can easily download the Technical Data Sheet (TDS).

OUR YOUTUBE CHANNEL

Want to learn about our technologies and innovations? Don't want to miss out on the Wolf Power Stage highlights of the WRC? Subscribe to our Youtube channel to access all of these and more.

www.youtube.com/wolflubes

Upgrade your maintenance efficiency by downloading the **WOLFLUBES LUBRICANT FINDER** onto your devices.



Complete the vehicle details to receive a full lubrication overview

Make your choice in the extensive database containing: cars, trucks, busses, motorcycles, agriculture, construction machinery, mining equipment, etc.

Discover a wide range of applications and fluids: engine oils, transmission fluids, brake system fluids, hydraulic fluids, greases, etc.



Scan the QR code or download on the App Store and Google play.



WOLF LUBRICANTS

Georges Gilliotstraat 52

2620 Hemiksem

Belgium

T. +32 (0)3 870 00 00

F. +32 (0)3 870 00 99

www.wolflubes.com

